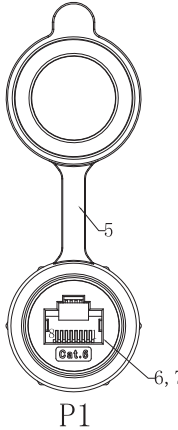
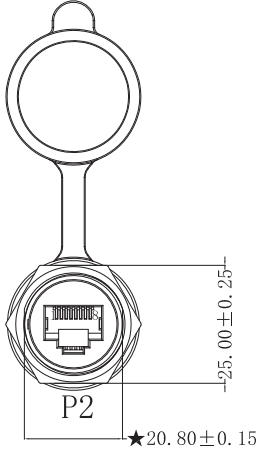
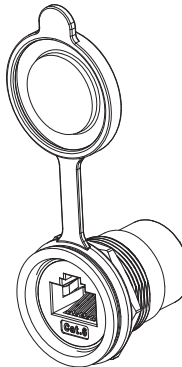
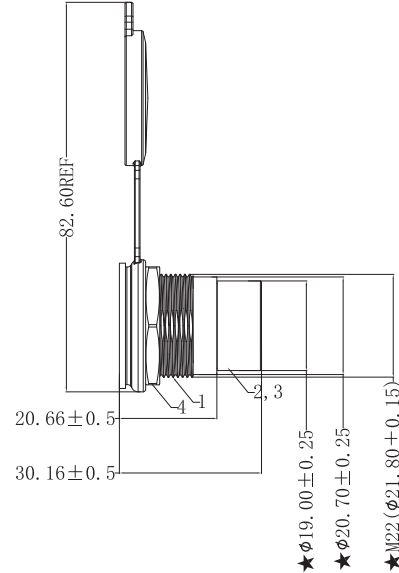




1	2	3	4	5	6	7	8																																								
REACH & RoHS COMPLIANT																																															
						NOTES 1. VOLTAGE RATING: 125 VAC RMS. 2. CURRENT RATING: 1.5 AMP. 3. CONTACT RESISTANCE : 30mΩ MAX. 4. INSULATION RESISTANCE: 500MΩ MIN. AT 100V DC . 5. DIELECTRIC STRENGTH:300V AC OR 500V DC RMS AT 0.5mA 50Hz/60Hz FOR 1MINUTE. 6. The mark with ★ is the key inspection dimension for QC 7. Appearance: Free from discoloration, scratches, and other abnormalities.																																									
		★ϕ19.00±0.25 ★ϕ20.70±0.25 ★M22 (ϕ21.80±0.15)																																													
		接点:		WIRE DIAGRAM <table><tr><td>P1</td><td>P2</td></tr><tr><td>1</td><td>1</td></tr><tr><td>2</td><td>2</td></tr><tr><td>3</td><td>3</td></tr><tr><td>4</td><td>4</td></tr><tr><td>5</td><td>5</td></tr><tr><td>6</td><td>6</td></tr><tr><td>7</td><td>7</td></tr><tr><td>8</td><td>8</td></tr><tr><td>S</td><td>S</td></tr></table>		P1	P2	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	S	S	开孔尺寸: 																					
P1	P2																																														
1	1																																														
2	2																																														
3	3																																														
4	4																																														
5	5																																														
6	6																																														
7	7																																														
8	8																																														
S	S																																														
						<table><tr><td>7</td><td>接地片</td><td>接地片</td><td>pcs</td><td>2</td></tr><tr><td>6</td><td>端子</td><td>C5210 镀金6U"</td><td>pcs</td><td>1</td></tr><tr><td>5</td><td>硅胶</td><td>硅胶70度 黑色 防尘帽套</td><td>pcs</td><td>1</td></tr><tr><td>4</td><td>螺母</td><td>M22锌合金螺母</td><td>pcs</td><td>1</td></tr><tr><td>3</td><td>塑壳</td><td>M22锌合金内部塑壳 RJ45 CAT6下盖 PA66+30%GF 黑色 UL94-V0</td><td>pcs</td><td>1</td></tr><tr><td>2</td><td>塑壳</td><td>M22锌合金内部塑壳 RJ45 CAT6上盖 PA66+30%GF 黑色 UL94-V0</td><td>pcs</td><td>1</td></tr><tr><td>1</td><td>外壳</td><td>锌合金M22外壳 银色</td><td>pcs</td><td>1</td></tr><tr><td>NO.</td><td>TITLE</td><td>STANDARD</td><td>UNIT</td><td>QTY</td></tr></table>		7	接地片	接地片	pcs	2	6	端子	C5210 镀金6U"	pcs	1	5	硅胶	硅胶70度 黑色 防尘帽套	pcs	1	4	螺母	M22锌合金螺母	pcs	1	3	塑壳	M22锌合金内部塑壳 RJ45 CAT6下盖 PA66+30%GF 黑色 UL94-V0	pcs	1	2	塑壳	M22锌合金内部塑壳 RJ45 CAT6上盖 PA66+30%GF 黑色 UL94-V0	pcs	1	1	外壳	锌合金M22外壳 银色	pcs	1	NO.	TITLE	STANDARD	UNIT	QTY
7	接地片	接地片	pcs	2																																											
6	端子	C5210 镀金6U"	pcs	1																																											
5	硅胶	硅胶70度 黑色 防尘帽套	pcs	1																																											
4	螺母	M22锌合金螺母	pcs	1																																											
3	塑壳	M22锌合金内部塑壳 RJ45 CAT6下盖 PA66+30%GF 黑色 UL94-V0	pcs	1																																											
2	塑壳	M22锌合金内部塑壳 RJ45 CAT6上盖 PA66+30%GF 黑色 UL94-V0	pcs	1																																											
1	外壳	锌合金M22外壳 银色	pcs	1																																											
NO.	TITLE	STANDARD	UNIT	QTY																																											
 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: M22锌合金 CAT6 RJ45转接头 180度 异向		SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song																																							
		PART NO.: WHZJT020295		SCALE 1:1	REV A0	<table><tr><td>x±0.35</td><td>x°±3.0°</td></tr><tr><td>.x±0.30</td><td>.x°±2.0°</td></tr><tr><td>.xx±0.25</td><td>.xx°±1.5°</td></tr><tr><td>.xxx±0.10</td><td>.xxx°±1.0°</td></tr></table>		x±0.35	x°±3.0°	.x±0.30	.x°±2.0°	.xx±0.25	.xx°±1.5°	.xxx±0.10	.xxx°±1.0°	CHECKED BY: Elvis.Song																															
x±0.35	x°±3.0°																																														
.x±0.30	.x°±2.0°																																														
.xx±0.25	.xx°±1.5°																																														
.xxx±0.10	.xxx°±1.0°																																														
TEL: +86 400 1048 018		REMARK: 带防尘帽 接地 6U" 锌合金外壳银色		SHEET 1/1				DESIGNED BY: Sunny.Xu																																							
WEB: WWW.VOOHU.CN																																															