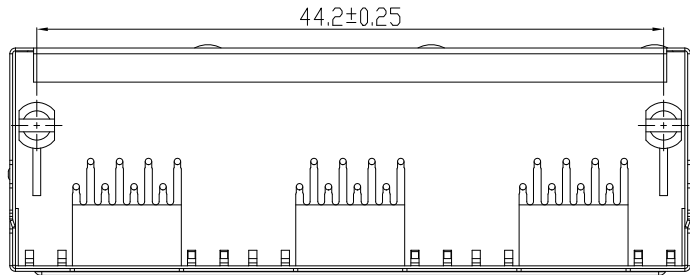
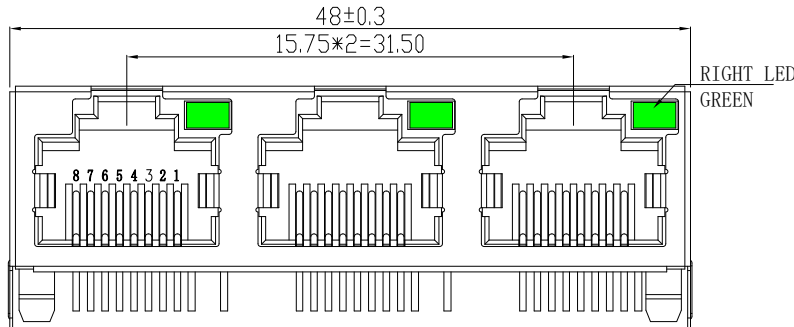
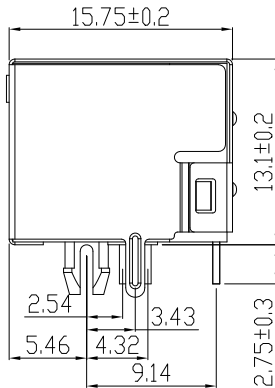
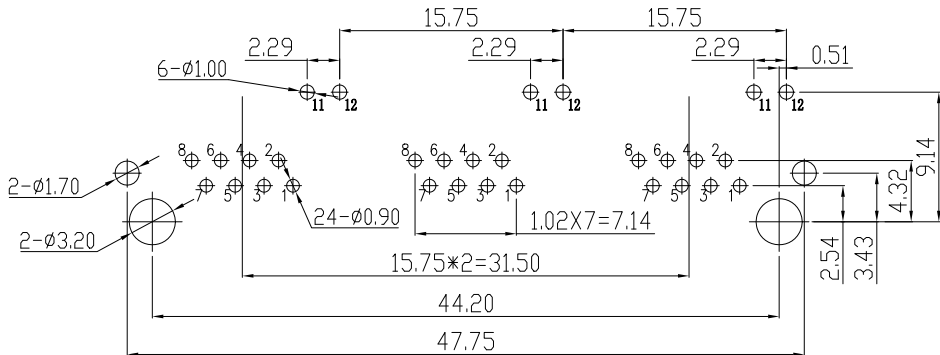


1	2	3	4	5	6	7	8
REACH & RoHS COMPLIANT							
				LED R GREEN 11  12			
							
 PC Board Layout				NOTES: ELECTRICAL: 1. VOLTAGE RATING: 125V AC. 2. CURRENT RATING: 1.5A. 3. CONTACT RESISTANCE: 30 mΩ MAX. 4. INSULATION RESISTANCE: 500 MΩ MIN @ 500V DC. 5. DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN. MECHANICAL: 1. INSERT MATERIAL: UL94V-0. 2. CONTACT MATERIAL: Ø0.46mm C51000 (QSn4-0.3) PHOSPHOR BRONZE GOLD PLATING OVER NICKEL. 3. SHIELD: 0.20mm THICKNESS H65Y BRASS NICKEL PLATED. 4. MATING/UNMATING FORCE: 20N Max. 5. RETENTION STRENGTH: 50N pendant 60±5s. 6. OPERATING LIFE: 750 CYCLES MIN. ENVIRONMENTAL: 1. STORAGE: -40℃ ~ +85℃ RELATIVE HUMIDITY<70%. 2. OPERATION: -40℃ ~ +85℃.			
 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: 56S 1X3 8P8C LED(左无灯右绿)	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
		PART NO.: WH56I3388A0111101	SCALE 1:1	REV A0	x±0.35 .x±0.30	x°±3.0° .x°±2.0°	CHECKED BY: Elvis.Song
TEL: +86 400 1048 018	WEB: WWW.VOOHU.CN	REMARK: D型(无后背脚)	SHEET 1/1		.xx±0.25 .xxx±0.10	.xx°±1.5° .xxx°±1.0°	DESIGNED BY: Sunny.Xu